MURR ELEKTRONIK
stay connected

MIRO 6.2 230V-1U OUTPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 6 A


Art.No.: 52040
Weight: 0.035
Country of origin: CZ
Model designation: MIRO 6,2-1AUSG.REL.230V-1U


1 NO/NC contact
6 A
230 V AC/DC
Screw terminals
safe separation (EN 60947-1)


Link to Product

Illustration




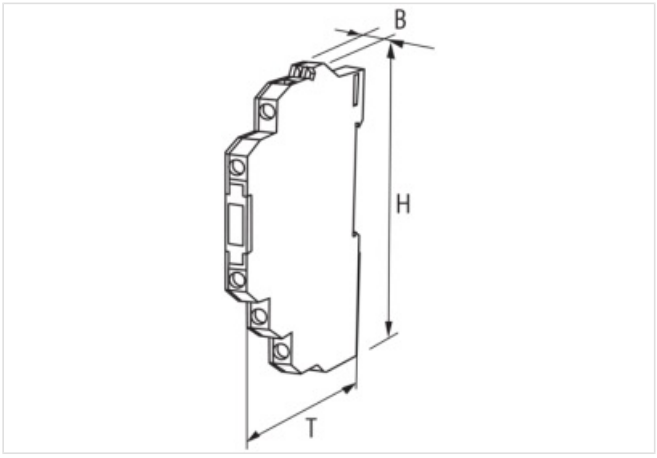

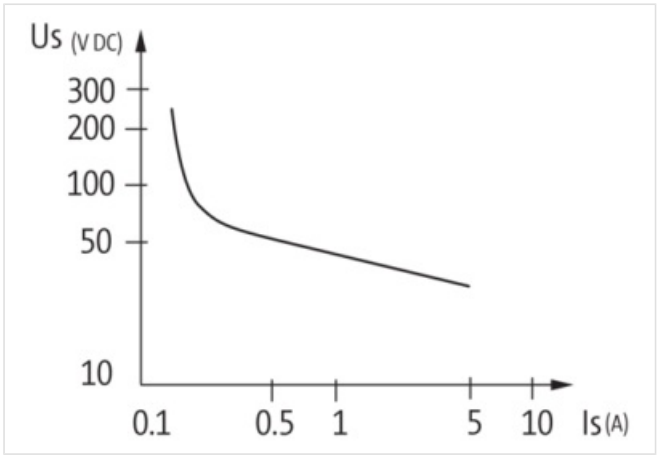

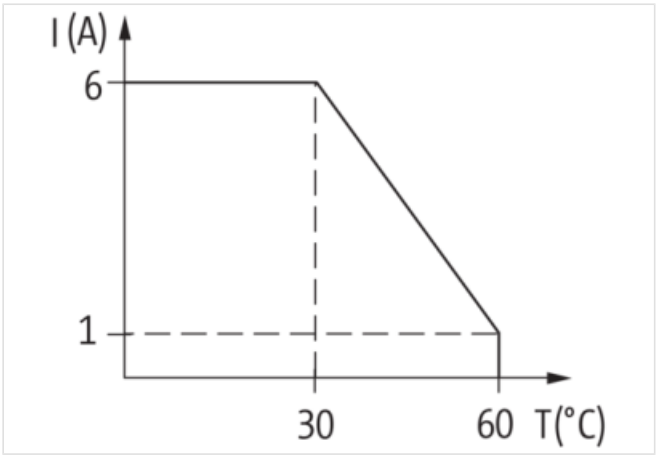

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-08-29

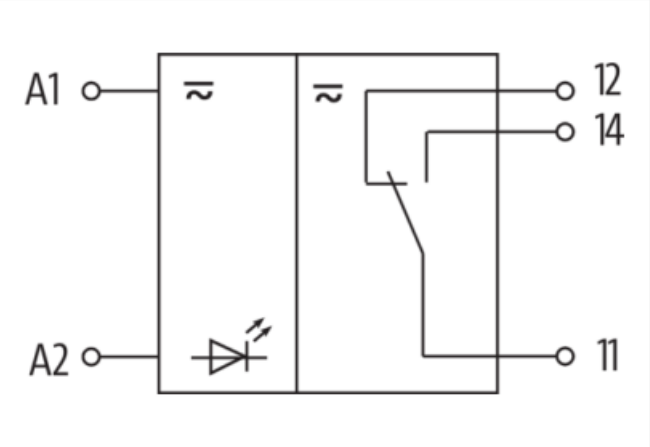

Product may differ from Image

Header	
Material short text	MIRO 6,2-1AUSG.REL.230V-1U
Commercial data	
URL Webshop	https://shop.murrelektronik.com/52040
GTIN	4048879027175
ECLASS-6.0	27371001
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-7.1	27371601
ECLASS-8.0	27371601
ECLASS-8.1	27371601
ECLASS-9.0	27371601
ECLASS-9.1	27371601
ECLASS-10.0.1	27371601
ECLASS-10.1	27371601
ECLASS-11.0	27371601
ECLASS-11.1	27371601
ECLASS-12.0	27371601
ECLASS-13.0	27371601
ECLASS-14.0	27371601
ETIM-5.0	EC001437
ETIM-6.0	EC001437
ETIM-7.0	EC001437
ETIM-8.0	EC001437
customs tariff number	85364900
EAN	4048879027175
Packaging unit	1
Electrical data | Input	
Input voltage AC	230 V
Input voltage AC min.	195 V
Input voltage AC max.	253 V
Input voltage DC	230 V
Input voltage DC min.	195 V

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-08-29

MURR ELEKTRONIK
stay connected

Input voltage DC max.	253 V
Input current	3 mA
Electrical data | Output	
Switching voltage AC max.	250 V
Switching voltage DC max.	250 V
Switching current max.	6 A
Switching current DC	10 mA
Switching frequency max.	10 Hz
Power rating AC max.	1,500 VA
Power rating DC max.	120 W
Utilization category AC-12 (EN IEC 60947-5-1)	6 A @ 24 V 6 A @ 110 V 6 A @ 230 V
Utilization category AC-15 (EN IEC 60947-5-1)	3 A @ 24 V 3 A @ 110 V 3 A @ 230 V
Utilization category DC-13 (EN IEC 60947-5-1)	1 A @ 24 V 0.2 A @ 110 V 0.1 A @ 230 V
Diagnostics	
Status indication LED	green
Device protection	
Condition lifetime	load-dependent
Device protection | Electrical	
Electrical lifetime	0 Cycles
Rated surge voltage	4 kV
Device protection | Mechanical	
Mechanical endurance	0 Cycles
Mechanical data	
Response time max.	10 ms
Drop-out time max.	15 ms
Bounce time max.	15 ms
Mechanical data | Material data	
Material contact	Ag Sn O2
Mechanical data | Mounting data	
Height	91 mm
Width	62 mm
Depth	71 mm
Mounting method	geschnappt
Suitable for mounting type	(EN 60715), mounting rail
Environmental characteristics | Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	55 °C
Connection type 5	
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	12
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	11

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-08-29

Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	14
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	A 1
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	A 2

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-08-29

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murrelektronik:

52040