MURR ELEKTRONIK
stay connected

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24…230V LED M16x1.5 Bridge Rectifier


Art.No.: 7000-29521-0000000
Weight: 0.034 kg
Country of origin: CN
Model designation: MSVS-EBBN-M16


Form A (18 mm)
24...230 V AC/DC
LED and bridge rectifier
metric
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



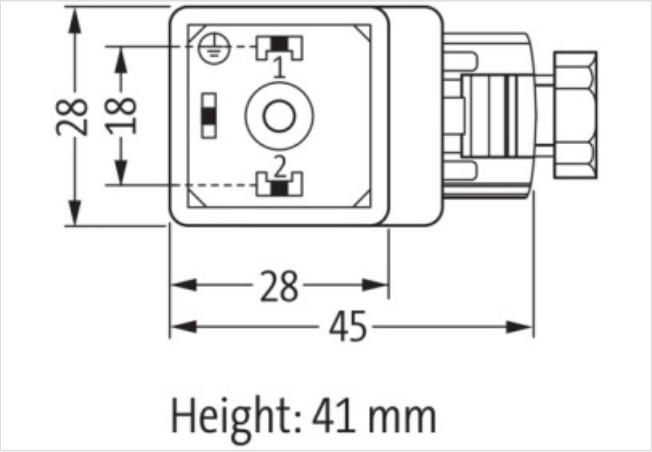

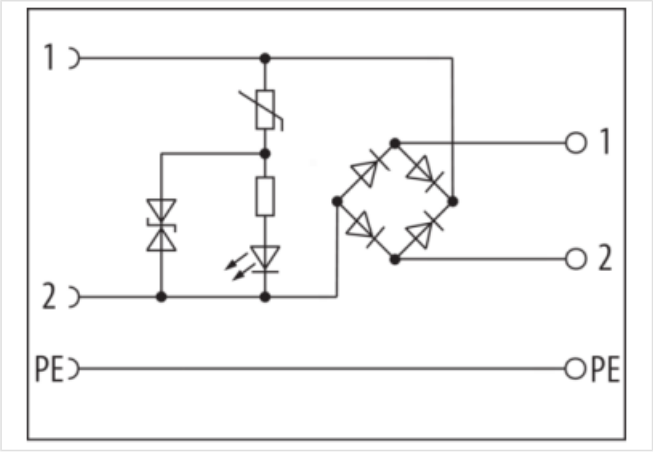

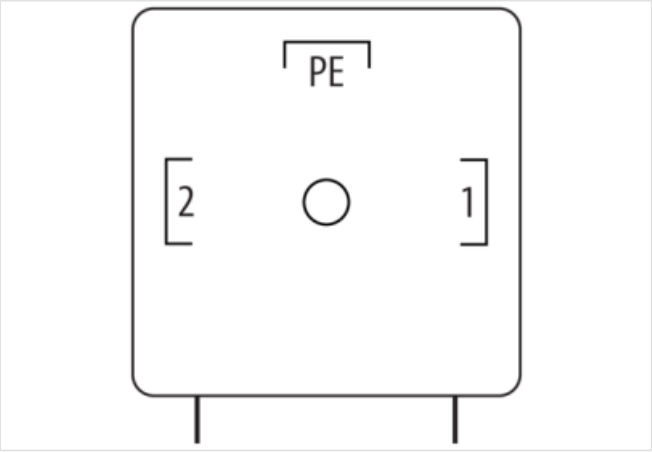

Product may differ from Image

Side 1

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-01-12

MURR ELEKTRONIK
stay connected

Degree of protection (EN IEC 60529)	IP65
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-29521-0000000
customs tariff number	85366990
EAN	4048879187374
Packaging unit	1
Electrical data | Supply	
Operating voltage AC min.	24 V
Operating voltage AC max.	230 V
Operating voltage DC min.	24 V
Operating voltage DC max.	230 V
Current operating per contact max.	1 A
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section max.	1.5 mm²
Installation | Connection	
Tightening torque	0.4 Nm
Mounting set	M16 x 1.5
Installation | Pin assignment	
No. of poles	PE
Device protection | Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	2
Rated surge voltage	2.5 kV
Material group (IEC 60664-1)	III
Mechanical data | Mounting data	
Fastening screw	M3x31
Clamping range min.	5 mm
Clamping range max.	10 mm
Environmental characteristics | Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Important installation notes	
Note on bending radius	**Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-01-12