

M12 Power female 0° L-cod. screw terminal5-pol., max. 2,5mm², 8 - 13mm

Art.No.: 7000-P4611-0000000

Weight: 0.055 kg

Country of origin: DE

Model designation: MSWBL-U-SK max. 2.5mm²

Female straight

M12

5-pole

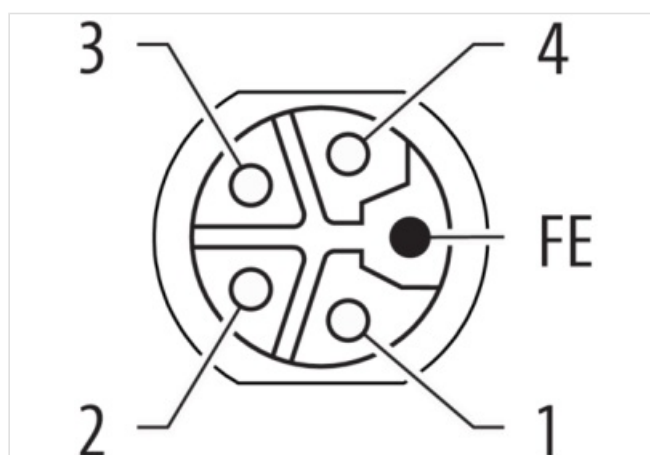
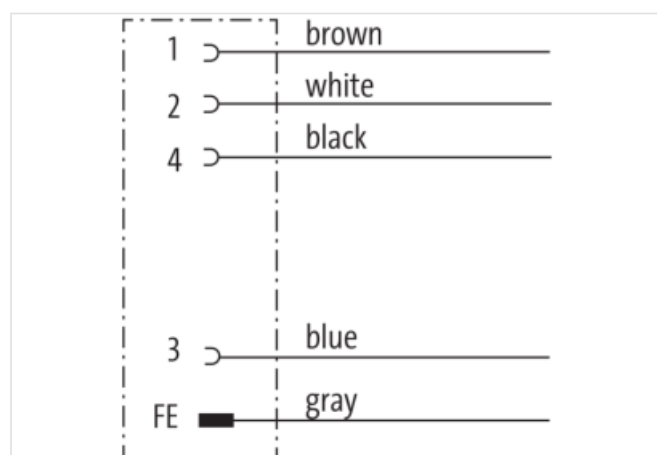
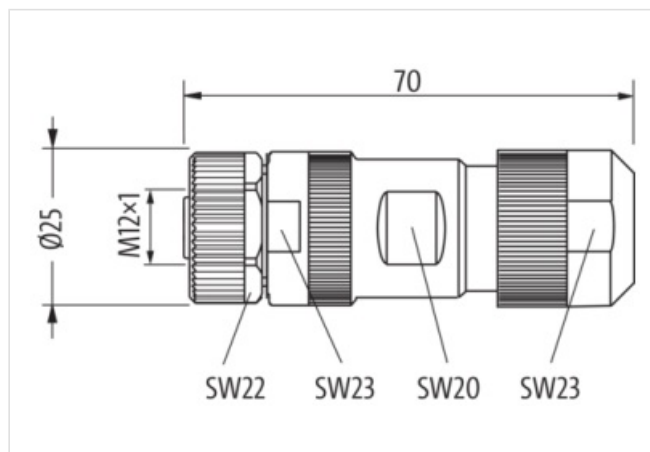
L-coded

Screw terminals

Sealing range (cable Ø)

8...13 mm

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Header**

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-01-09

穆尔电子元器件（上海）有限公司 | 上海市普陀区绥德路628号C幢 | 200331 上海 | Fon +86 21 6284 7607 | Fax +86 21 6284 8526 | shop@murrelektronik.com.cn | shop.murrelektronik.com.cn

Material short text	MSWBL-U-SK max. 2.5mm²
Side 1	
Family construction form	M12P
No. of poles	5
Coding	L
Gender	female
Mounting method	inserted, screwed
Threaded hole	M12 x 1
Tightening torque	0,6 Nm
Cable outlet	straight
Material contact	Copper alloy
Side 2	
Mounting method	Field-wireable
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-P4611-0000000
GTIN	4048879786560
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-7.1	27440102
ECLASS-8.0	27440102
ECLASS-8.1	27440102
ECLASS-9.0	27440116
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440102
ECLASS-11.0	27440106
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC002635
ETIM-6.0	EC002635
ETIM-7.0	EC002635
ETIM-8.0	EC002635
customs tariff number	85366990
EAN	4048879786560
Packaging unit	1
customs tariff number	85366990
EAN	4048879786560
Packaging unit	1
Electrical data Supply	
Operating voltage AC max.	63 V
Operating voltage DC max.	63 V
Current operating per contact max.	16 A
Diagnostics	
Status indication LED	No
Installation	
Cross section connection with wire end ferrule max.	1,5 mm²
Cross section connection with wire end ferrule AWG max.	16 AWG

Cross section connection without wire end ferrule max.	2,5 mm ²
--	---------------------

Cross section connection without wire end ferrule AWG max.	14 AWG
--	--------

AWG number max.	14
-----------------	----

Installation | Connection

Connection	Screw terminals SK
------------	--------------------

Mounting set	M12 x 1
--------------	---------

Mating cycles min.	100
--------------------	-----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Additional condition protection degree	inserted, screwed
--	-------------------

Pollution Degree	3
------------------	---

Overvoltage category (EN 60950-1)	III
-----------------------------------	-----

Rated surge voltage	1,5 kV
---------------------	--------

Material group (IEC 60664-1)	II
------------------------------	----

Mechanical data | Material data

Material housing	PA
------------------	----

Material contact carrier	PA
--------------------------	----

Coating contact	gold plated
-----------------	-------------

Mechanical data | Mounting data

Mounting method	Schraubgewinde
-----------------	----------------

Clamping range min.	8 mm
---------------------	------

Clamping range max.	13 mm
---------------------	-------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---