MURR ELEKTRONIK
stay connected

M12 female 0° A-cod. screw terminal F&B Pro

5-pol., 0,25 - 1,0mm², 3,5 - 6mm


Art.No.: 7024-12921-0000000
Weight: 0.042 kg
Country of origin: PL
Model designation: MSBL0-U


M12 F&B Pro
Female straight
5-pole
Screw terminals
The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



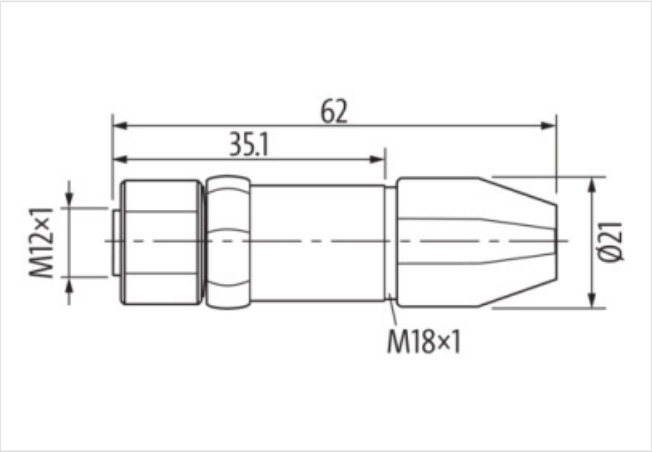

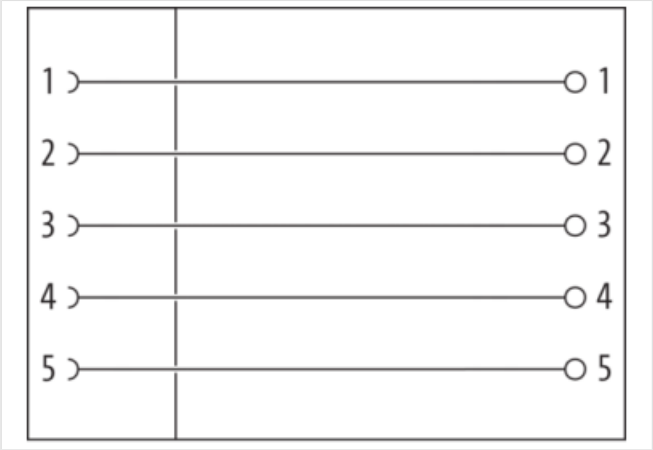

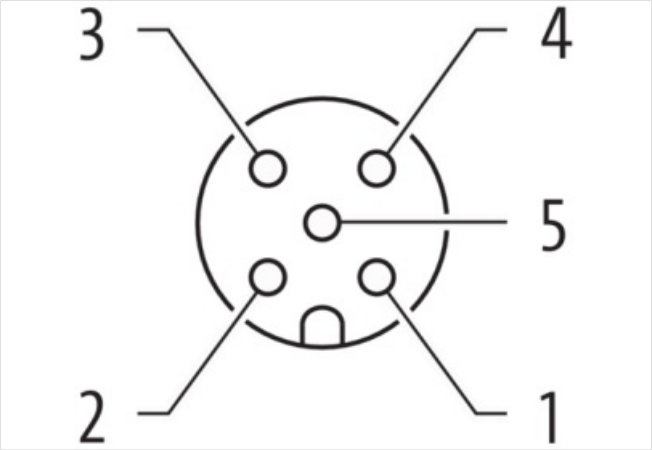

Product may differ from Image

Header

Material short text	MSBL0-U

Side 1

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-01-09

MURR ELEKTRONIK
stay connected

Family construction form	M12
Degree of protection (EN IEC 60529)	IP67, IP69K, IP68, IP65
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7024-12921-0000000
GTIN	4048879804639
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-7.1	27440102
ECLASS-8.0	27440102
ECLASS-8.1	27440102
ECLASS-9.0	27440116
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440102
ECLASS-11.0	27440106
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC002635
ETIM-6.0	EC002635
ETIM-7.0	EC002635
ETIM-8.0	EC002635
customs tariff number	85366990
EAN	4048879804639
Packaging unit	1
customs tariff number	85366990
EAN	4048879804639
Packaging unit	1
Electrical data | Supply	
Operating voltage AC max.	60 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Installation	
Connection cross section min.	0,25 mm²
Connection cross section max.	1 mm²
Installation | Connection	
Tightening torque	0,6 Nm
Mounting set	M12 x 1
Width across flats	SW19
Device protection | Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data | Material data	
Material housing	PA
Locking material	Stainless steel 1.4404 (V4A)
Material gasket	EPDM
Mechanical data | Mounting data	
Mounting method	Schraubgewinde
Clamping range min.	3,5 mm
Clamping range max.	6 mm

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-01-09

stay connected

Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	100 °C
Important installation notes	
Note on bending radius	**Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-01-09