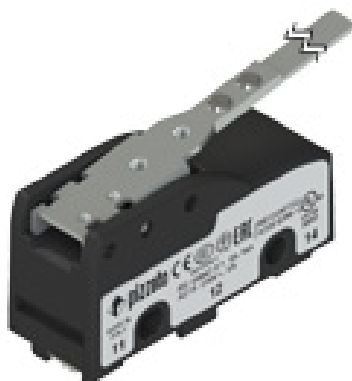


Article: **MK V11D35**
Description: Microswitch with long lever

Sheet: 25889-0-en-2.1.0
Date: 2026/01/02
Page: 1/3


Housing:

Technopolymer housing

Protection degree:

IP00 without terminal cover

IP20 with terminal cover VF C01, VF C03

IP40 with terminal cover VF MKCx1x, VF C02

General data:

Ambient temperature: -25°C ... +85°C

Max. actuation frequency: 3600 operating cycles/hour

Mechanical endurance: 10 million operating cycles

Safety parameters B10D: 20,000,000 for NC contacts

Contact block characteristics:

1NO+1NC changeover

Mobile contact with single interruption and double contacts

Positive contact opening in conformity with standards:



Device without positive opening. If installed individually, not suitable for safety applications



Contacts with single interruption and double contacts

With direct and back direct action (F, D)


With inverted action (R)

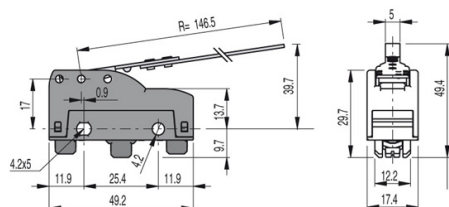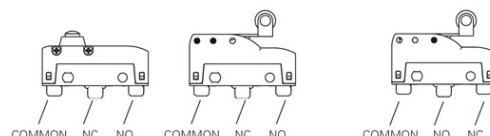
Actuation forces and travels:

PC: 26,2mm FS: 0,28N

OC: 13,7mm FR: 0,22N

CD: 2,5mm



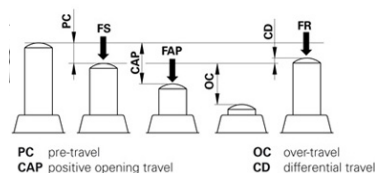

Cable cross section (flexible copper strands):

min. 1 x 0,34 mm² (1 x AWG 22)

max. 2 x 1,5 mm² (2 x AWG 16)

Wire stripping length:

7 mm

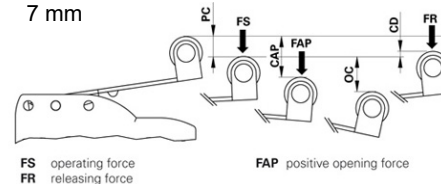

Screw terminals V with plate

Compliance with the requirements of:

Low Voltage Directive 2014/35/EU,

EMC Directive 2014/30/EU,

RoHS Directive 2011/65/EU.

Conformità alle norme:

IEC 60947-5-1, EN 60947-5-1, IEC 60529,

EN 60529, EN 60947-1, IEC 60947-1, EN

IEC 63000.

Approvals:

UL 508, CSA C22.2 No. 14, EN 60947-1,

EN 60947-5-1

Device screw tightening torques:

Terminal screws: 0,6 ... 0,8 Nm

M4 fixing screws, body (insert washer):

0,8 ... 1,2 Nm

Attention: A tightening torque higher than 1,2 Nm can cause the breaking of the microswitch.

Markings and quality marks:

Electrical data:

Thermal current (I_{th}): 16 A

Rated insulation voltage (U_i): 250 Vac 300 Vdc

Rated impulse withstand voltage (U_{imp}): 4 kV

Conditional short circuit current: 1000 A acc. to EN 60947-5-1

Protection against short circuits: type gG fuse 16 A 250 V

Pollution degree: 3

Dielectric strength 2000 Vac/min.

Utilization category:

Alternate current: AC15 (50...60 Hz)

U_e (V) 120 250

I_e (A) 3 5

Direct current: DC13

U_e (V) 24 125 250

I_e (A) 4 0,6 0,3

Article: **MK V11D35**
Description: Microswitch with long lever

Sheet: 25889-0-en-2.1.0
Date: 2026/01/02
Page: 2/3

Characteristics approved by IMQ and CCC

Rated insulation voltage (U_i): 250 Vac
Conventional free air thermal current (I_{th}): 16 A
Protection against short circuits: type gG fuse 16 A 250 V
Rated impulse withstand voltage (U_{imp}): 4 kV
Conditional short circuit current: 1000 A
Protection degree of the housing: IP00
Terminals: screw terminals/faston
Pollution degree: 3
Utilization category: AC15
Operating voltage (U_e): 250 Vac (50 Hz)
Operating current (I_e): 5 A

Forms of the contact element: A; B; C

Positive opening of contacts on contact blocks: 1, 3


In conformity with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Characteristics approved by UL

Electrical Ratings:
Q300 pilot duty (69 VA, 125-250 V dc)
A300 pilot duty (720 VA, 120-300 V ac)

Mechanical stop

Acc. to EN ISO 14119 paragraph 5.2 "the position sensors must not be used as mechanical stop".

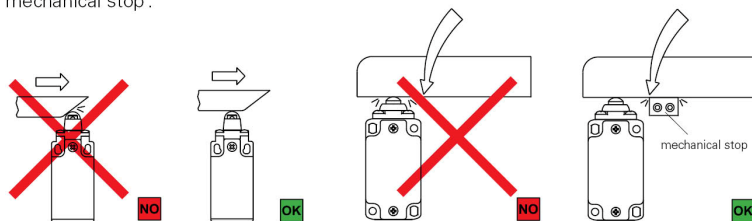


The actuator must not exceed the max. travel as indicated in the travel diagrams.

The guard must not use the switch head as a mechanical stop.

Lever with direct action (D) - Type 3

V_{max} (m/s)	V_{min} (mm/s)
$0,03 \times L$	$0,0166 \times L$



Article: **MK V11D35**
Description: Microswitch with long lever

Sheet: 25889-0-en-2.1.0
Date: 2026/01/02
Page: 3/3

This device **does not** feature positive opening and therefore **cannot be used individually for safety functions.**